



**Standards:**

**Common Lengths:** 28-53 feet

**Width:** 96 - 102 inches

**Height:** 12.5 - 13.5 feet

**Door Type:** Swing Door/Roller door (equip varies by carrier)

**Capacity:**

**Max Weight @ 53 ft length:**

45,000 lbs

**Max Pallets @ 53 ft:** 26 pallets

**Usage:**

Used to carry most common freight (boxed, crated, palletized, etc.)

## Common Standard Freight Trailer Specifications

Overall			Interior			Rear Door		Capacity	Max Weight
Length	Width	Height	Length	Width	Height	Width	Height		
40 ft	96"	12' 6"	39' 6"	92.5"	94.5"	92"	92"	2,398 cu ft	11,300 lbs
43 ft	96"	13' 0"	41' 6"	92.5"	100.5"	92"	98"	2,711 cu ft	11,900 lbs
48 ft	102"	13' 6"	47' 6"	98.5"	100.6"	98"	100.6"	3,465 cu ft	13,500 lbs
53 ft	102"	13' 6"	47' 6"	98.5"	108"	94"	102"	3,489 cu ft	13,500 lbs

Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer. This is only a guide and should not be used as a definitive reference for dock planning.



**Standards:**

**Common Lengths:** 22-26 feet

**Width:** 96 - 102 inches

**Height:** 12.5 - 13.5 feet

**Door Type:** Swing Door/Roller

Door (varies by carrier)

**Capacity:**

**Max Weight @ 26 ft length:**

14,000 lbs

**Max Pallets @ 26 ft:** 12 pallets

**Usage:**

**Available Options:**

Lift Gate

Refrigeration



**Standards:**

**Common Lengths:** 28 feet

**Width:** 96 - 102 inches

**Height:** 12.5 - 13.5 feet

**Door Type:** Swing Door/Roller

Door (varies by carrier)

**Capacity:**

**Max Weight @ 28 ft length:**

22,000 lbs

**Max Pallets @ 28 ft:** 14 pallets

**Usage:**

**Available Options:**

Lift Gate

Single, Tandem & Triple



**Standards:**

**Common Lengths:** 20, 40, 45, 48, 53 feet

**Width:** 98 - 102 inches

**Height:** 8.5 — 9.5 feet


**Door Type:** Swing Door

**Capacity:**

**Max Weight @ 40 ft length:** 71,390 lbs

**Usage:**

Designed to transport cargo internationally

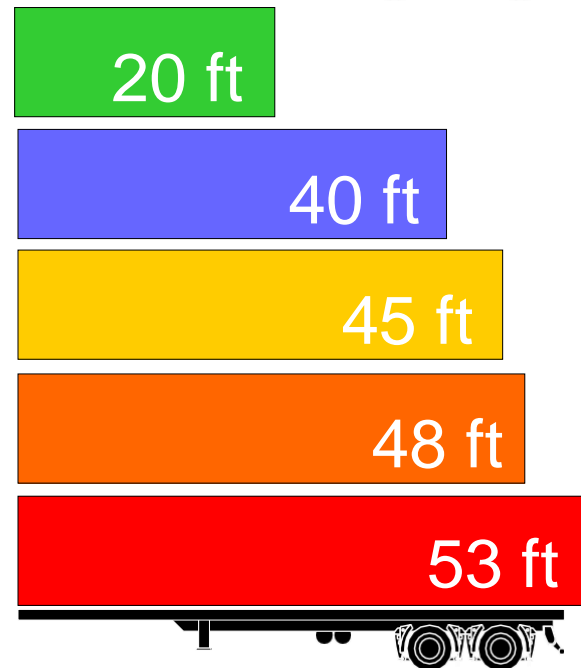

## Common Shipping Container Specifications

	20'	40'	45'	48'	53'
<b>Length</b>	19' 10"	40'	45'	48'	53'
<b>Inside Length</b>	19' 4"	39' 6"	44.6'	47.6'	52.3"
<b>Height</b>	8' 6"	8' 6"	9' 6"	9' 6"	9' 6"
<b>Inside Height</b>	7' 9"	7' 10"	8' 10"	8' 10"	8' 10"
<b>Door (H x W)</b>	7'6" X 7' 8"	7'6" X 7' 8"	8' 6" X 7' 8"	8' 6" X 7' 8"	8' 6" X 7' 8"
<b>Width</b>	8'	8'	8'	8' 6"	8' 6"
<b>Inside Width</b>	7' 8"	7' 8"	7' 8"	8' 2"	8' 2"
<b>Capacity</b>	1,170 ft <sup>3</sup>	2,390 ft <sup>3</sup>	2,700 ft <sup>3</sup>	3,000 ft <sup>3</sup>	3,800 ft <sup>3</sup>

Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer. This is only a guide and should not be used as a definitive reference for dock planning.